

OmniaScreen

The standard in health & comfort



Metallised screen to increase well-being

- Solar reflectance up to 74%
- Great value / performance ratio
- Healthy, phthalate-free screens
- Clear view-through and robust look and feel
- Beautiful basket weave construction
- Excellent thermal and visual comfort

Verosol

Transparency



293



3% OF

Specifications OmniaScreen

	Thickness	0.55 mm
	Weight	440 g/m ²
	Width	240 cm +/- 5 cm
	Composition	75% PVC / 25% PET
	Flame retardant standards	NFPA 701, NF P 92503 M2, BS 5867-2 Type B
	Environmental standards	Phthalate free, Ökotex Standard 100, ISO 14001 and ISO 9001, Greenguard Gold
	Solar reflection outside*	73-74%
	Light transmission*	5-6%
	Openness Factor*	3-4%


*Preliminary data

Please check www.verosol.com for the latest information


Optical properties are measured according to EN 14500, ISO 9050 & EN 410. For more information about technical data, energy savings and worldwide distribution, refer to www.verosol.nl, www.verosol.com or www.verosol.com.au
Disclaimer: The technical data are based on average data and are subject to production tolerances.

6 Colours

The colours shown may vary from the real colours due to the printing process.

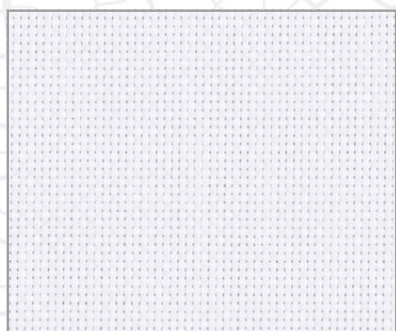

FDO1 White

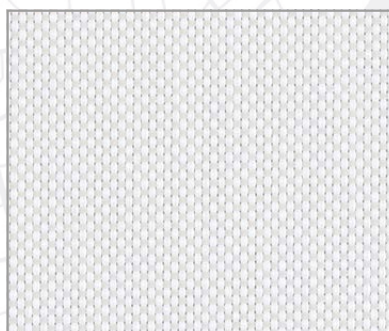

FDO2 Beige



FDO3 Light Grey




FBO3 Brown



FBO2 Dark Grey



FBO1 Black

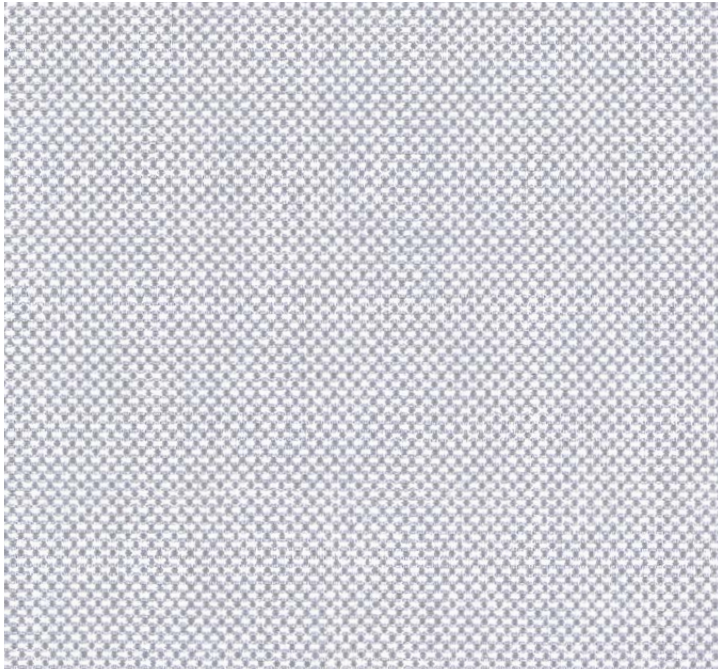

Applications for OmniaScreen:



Roller Blind



Panel Tracks



Verticals

