


# Rollerblind QS60 Standard

## Product information

The basic model of the QS6 system. Main feature of this model is the high user comfort, due to the easy and smooth operation and of course the low noise chain control system.

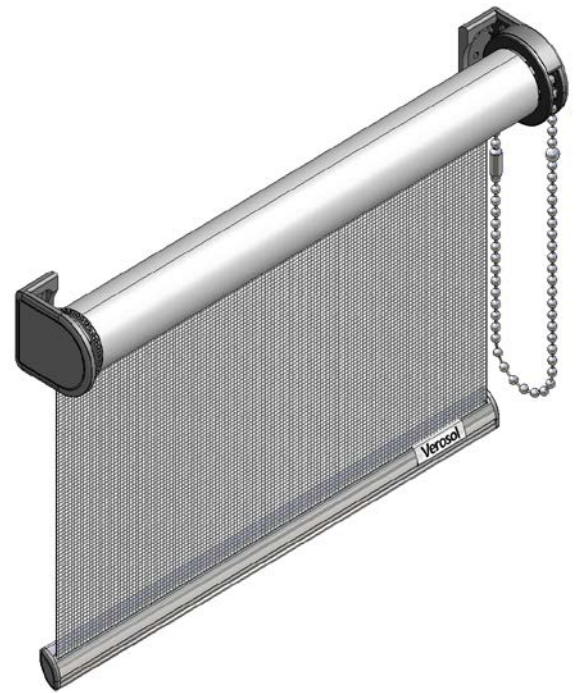

## Technical information

<b>Product Code</b>	QS60.0	QS60.4
<b>Product Name</b>	Standard rollerblind	Standard Rollerblind
<b>Operation</b>	Chain Operation	24V DC Somfy
<b>Tube</b>	<b>Material</b>	Extruded Aluminium $\varnothing$ 34mm
<b>Dimensions</b>	<b>Width</b>	400mm min - 1800mm max
	<b>Drop</b>	300mm min - 2800mm max
	<b>Maximum Area</b>	5,04m <sup>2</sup>
<b>Bottom Rail</b>	<b>Material</b>	Extruded Aluminium Alloy- Asymetric Profile
	<b>Dimensions</b>	12mm W x 19mm H
	<b>Colours</b>	RAL 9001,,9010,9016 Anodised
	<b>Paint</b>	Electrostatic Powdercoated and Baked
<b>End Caps</b>	<b>Material</b>	UV Stabilised Polymer Acrylic
	<b>Colours</b>	Grey,White,Black
<b>Chain</b>	<b>Material</b>	Aluminium or Stainless Steel
<b>Installation Brackets</b>	<b>Material</b>	Press formed steel, pre-treated and powder coated
	<b>Operation</b>	Top or Face Fixing - concealed when installed

# Rollerblind QS60 Standard



## Motorisation

<b>Product Code</b>	<b>QS60.4</b>	<b>QS60.5</b>	
<b>Product Name</b>	Standard Rollerblind	Standard Rollerblind	
<b>Operation</b>	24V DC Somfy	12V DC Somfy Battery	
<b>Tube</b>	Extruded Aluminium $\approx$ 34mm	Extruded Aluminium $\approx$ 34mm	
<b>Dimensions</b>	<b>Width</b>	400mm min - 1800mm max	400mm min - 1800mm max
	<b>Drop</b>	300mm min - 2800mm max	300mm min - 2800mm max
	<b>Maximum Area</b>	5,04m2	5,04m2

## Optional


<b>Guiding</b>	<b>Angle</b>	Up to 15° angle from vertical
	<b>Maximum Width</b>	1500mm
	<b>Maximum Area</b>	4,2m2
	<b>Cable</b>	Steel
<b>Bottom Installation Bracket</b>	<b>Material</b>	Stainless Steel

## System diagrams

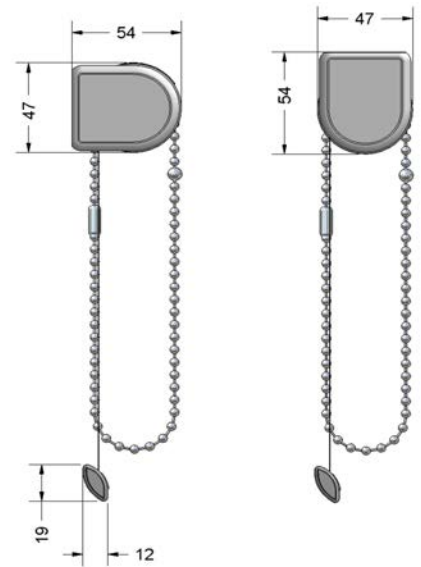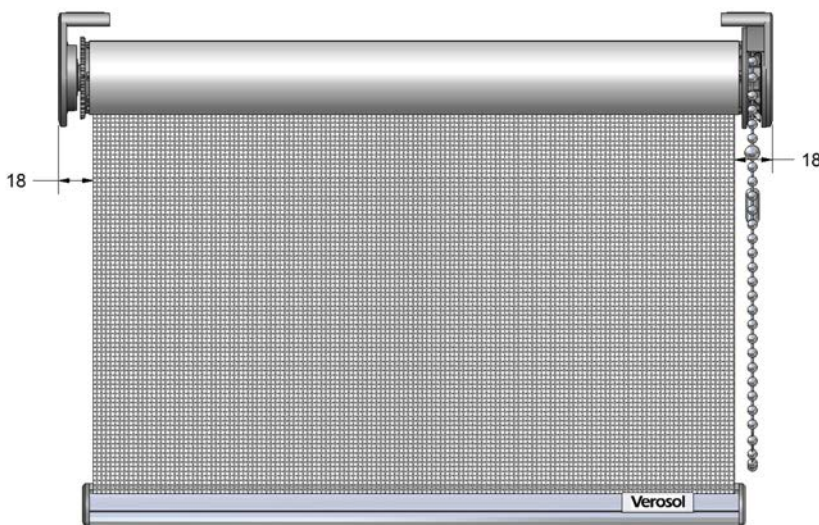

*Top Fix*

*Face Fix*

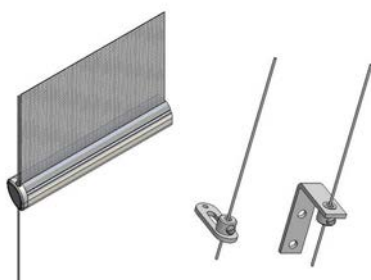

*Guiding Wire*