

Vario Pleated Blind

Product information

Verosol's Vario Pleated Blind combines the soft appeal of a curtain with the versatility and simplicity of a blind. The ideal solution for heat and light control, and the blind almost disappears when lowered or raised. You have the option to raise the blind in the conventional way or drop towards the window sill.

The Vario Pleated Blind is an ideal solution where privacy and/or ventilation is required. Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window. Useful for sash windows or when privacy is required down low but sunlight is required



Technical information



Product Code	P71.0	P71.1	
Product Name	Vario Pleated	Vario Pleated	
Operation	Cord Operation	Profile Operation	
Dimensions	Width *	300mm min - 2900mm max *	300mm min-1000mm max *
	Drop	200mm min - 3000mm max	400mm min-2000mm max
	Cord Lock	2700mm maximum width	N/A
	Maximum Area	7m ²	2m ²
Head Rail	Material	Extruded Aluminium Alloy- Asymmetric Profile	
	Dimensions	33mm W x 20mm H	
Bottom Rail	Material	Extruded Aluminium Alloy- Asymmetric Profile	
	Dimensions	30mm W x 12mm H	
	Colours	RAL 9001,9004,9010,7016,1001,1019, Anodised	
	Paint	Electrostatic Powdercoated and Baked	
Inner Rail	Material	UV Stabilised Acrylonitrile Butadiene Styrene [ABS] Plastic	
End Caps	Material	UV Stabilised Polymer Acrylic	
	Colours	Coordinated chosen from Grey,Black,Sandy Beige,White	
Lift and Blind Cords	Material	Braided Polyester [minimum diameter: 2.2mm]	
	Colours	Grey, Black, Sandy Beige, White	
Control Lock	Material	ULTEM / PPS-Fortran	
	Type	Front Mounted	
	Colour	Grey with coordinated colour cap	
Cord Position	Lift Cords 80mm from edge; Maximum spacing 500mm		
Installation Brackets	Material	Electro Plated Steel	
	Operation	Top or Face Fixing - concealed when installed	

Vario Pleated Blind

Optional


Guiding	Angle	Up to 15° angle from vertical
	Maximum Width	1500mm
	Maximum Area	4,8m ²
	Cable	Polyester cable with Kevlar, 20mm from edge
	Bottom Installation	
Bracket		
Guiding Channels	Material	Extruded Aluminium Alloy U profile
	Colours	RAL 9010,1001,8025,9004,7016,9001,1019, alu Anodised
	Dimensions	15mm W x 37mm H

System diagrams

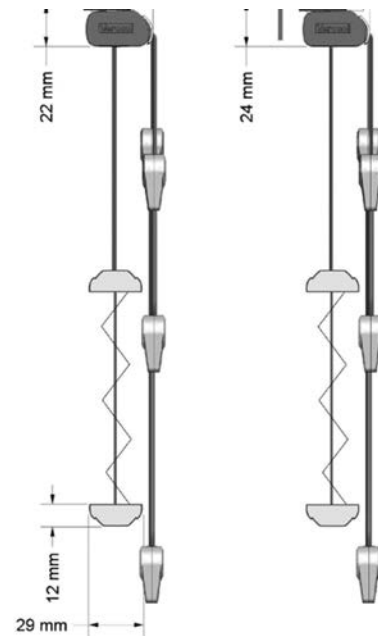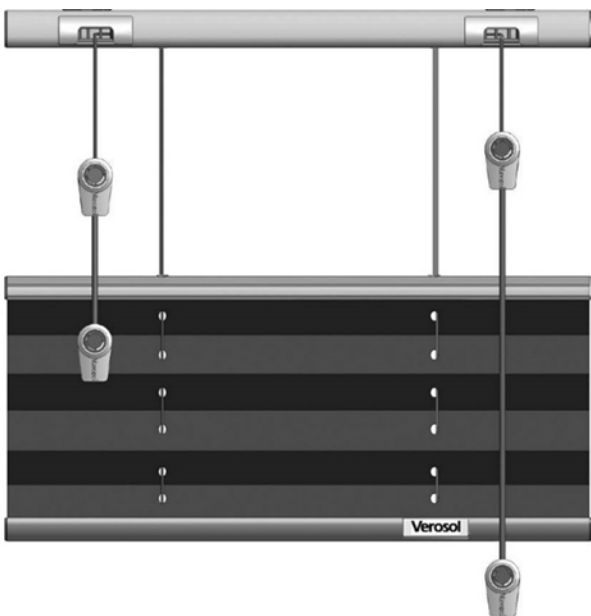


Top Fix


Face Fix




Guiding Channels




Screw Top Fix



Face Fix



Tape Top Fix



Face Fix

* When the maximum fabric segment width of 2200mm is exceeded, blinds will have three equal segments with two overlaps in the blind. The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm.